



## Standard Atmospheres Glovebox

Standard models of gloveboxes are complete standalone systems integrated with entire functional components. They are able to create an inert environment with less than 1 ppm of  $H_2O$  and  $O_2$ . The systems are modulated with antechambers, removable windows, adjustable trays, lighting units, adjustable shelves, and gloves, which meet most of the operational needs in the glovebox. The systems are made of welded stainless steel and are equipped with highest-quality components. We also provide optional components to meet your special requirements. The standard models include a series of glovebox chamber lengths including 1200, 1500, 1800, and 2400 mm. We also take custom-built orders according to your needs.

## KEY FEATURES

---


Glovebox with all-welded stainless steel design  
All stainless steel pipework  
Removable front window as an entry for large equipment  
Purifier regeneration frequency once per year  
Automatic antechamber control  
Mini antechamber  
Vacuum pump  
Oxygen Analyzer / Moisture Analyzer  
Auto purge function  
User friendly and simple operation: Color LCD touch panel and PLC controller  
Energy-Save mode, automatically reducing power consumption by up to 90% during idle periods  
Automatic regenerable H<sub>2</sub>O/O<sub>2</sub> purifier  
Attainable purity O<sub>2</sub><1 ppm , H<sub>2</sub>O<1 ppm (dew point also available for moisture reading)  
Industry leading low leak rate of <0.001vol%/h  
Stainless steel encapsulated blower with frequency converter  
Circulation capacity more than 80 m<sup>3</sup>/h (47 cfm) at ΔP = 60 mbar (60 Hz)  
Compatible with world-wide voltage standards  
Integrated high vacuum feedthroughs  
Conform to CE  
One year limited warranty, and lifetime technical support

## MAIN APPLICATIONS

---



Create oxygen-free and moisture-free environment for organometallic chemistry, organic synthesis, hydrophilic chemical handling, medical devices, electronic component handling, lithium battery handling, solar cell assembly, hemoglobin and metabolic research, catalyst handling, medicine synthesis, nuclear industry, membrane of organic EL preparation, etc.

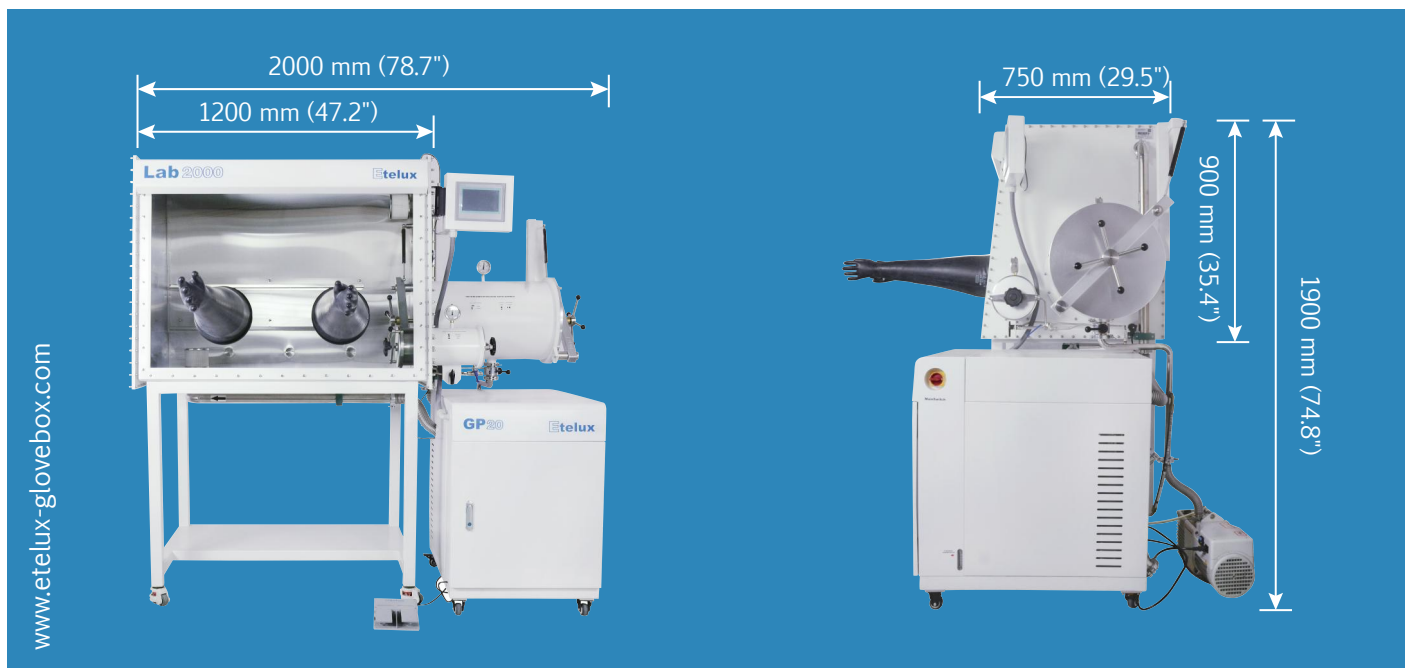






Package List		
Part Description	Quantity	Part Image
Quick Clamp KF 25	3 pcs	
Bellows Metal KF 25	1 pcs	
Glovebox Glove	2 pcs	
Oxygen Analyzer	1 pcs	
Moisture Analyzer	1 pcs	
Oil Mist Filter	1 pcs	
RV12 Vacuum Pump	1 pcs	

## ET-1200S Inert Vacuum Controlled Atmospheres Glovebox

External Structure			
Chamber Capacity		Approximately 28.2 cu. Ft (0.8 m³)	
Overall Dimensions		78.7" L x 31.5" W x 74.8" H, 2000 mm (L) x 800 mm (W) x 1900 mm (H)	
Overall Weight		880 lbs (400 kg)	
Electrical Voltage		· 230 VAC/50-60 Hz, 10 A · 115 VAC/50-60 Hz, 20 A · 100 VAC/50-60 Hz, 20 A	
Glovebox Chamber			
Description	Material	Stainless steel 304 , 3.0 mm in thicknes	
	Internal Dimensions	47.2" L x 29.5" W x 35.4" H, 1200 mm (L) x 750 mm (W) x 900 mm (H)	
Inclined Front Window	Material	Tempered glass, 8.0 mm in thickness, Lexan (polycarbonate) 10 mm in thickness upon request	
	Dimensions	44" L x 33" W, 1120 mm (L) x 840 mm (W)	
Glove Ports 	Tekaform	8.6"(220 mm) in diameter, O-ring sealed	
	Dimensions	Hard aluminum alloy or polyaldehyde upon request	
Gloves 	Material	Butyl rubber	
	Thickness	0.4 mm (standard) 0.8 mm upon request	
HEPA Filters 	Inlet and outlet filters eliminate particles with the size >0.3 µm		
Lighting	Fluorescent lamp, front-ceiling mounted		

Leakage Rate		Typically <0.001vol%/h ·By oxygen leak decay test method according to ISO 10648-2: 1994 ·By pressure change test method according to ISO 25412		
Gas Purification System				
Description	· Automated removal of H <sub>2</sub> O and O <sub>2</sub> · Single column, automated column regeneration; dual purification columns (optional) · Closed stainless steel loop for gas recirculation and purification			
Operating Gas	Working gas	Nitrogen, Argon, or Helium (purity >99.999%)		
	Regeneration gas	Mixture of H <sub>2</sub> (5-10%) and working gas		
<div>Vacuum Pump</div> <div></div>	Description	Rotary vane pump, installed with oil mist filter, oil circulator, and automatic gas ballast control; dual-stage. Or dry pump upon request	<div></div>	
	Pumping rate	7.0 cfm (12 m <sup>3</sup> /h)		
	Ultimate vacuum	< 2 x 10 <sup>-3</sup> mbar		
Circulation Unit	Blower	Integrated blower, oil-free, highly efficient		
	Flow Rate	47 CFM (80 m <sup>3</sup> /h)		
Valves		Electro-pneumatic DN40		
Leakage Rate		Typically <0.001vol%/h ·By oxygen leak decay test method according to ISO 10648-2: 1994 ·By pressure change test method according to ISO 25412		
Antechamber				
Main Antechamber	Material	Stainless steel 304 ; 3.0 mm in thickness		
	Internal Dimensions	14"(Φ) x 23.6"(L), 360 mm (Φ) x 600 mm (L)		
<div></div>	Vacuum	1 x 10 <sup>-2</sup> mbar		

<div>Mini Antechamber</div> <div></div>	Material	Stainless steel 304; 3.0 mm in thickness	
	Inside dimensions	5.9"(Φ) x 13"(L), 150 mm (Φ) x 330 mm (L)	
	Vacuum	1 x 10 <sup>-2</sup> mbar	
Purging System			
Function		By setting up the purging time and pressure, the system automatically purges the chamber O <sub>2</sub> level, timer or manually controlled	
Analyzers			
<div>O<sub>2</sub>-Analyzer</div> <div></div>	Dimensions	8" L x 3.1" W x 2.4" H, 205 mm (L) x 80 mm (W) x 60 mm (H)	
	Measurement Range	0 to 1000 ppm	<div></div>
	Other Analyzer	GE oxy.IQ™ Oxygen Transmitter upon request	
<div>H<sub>2</sub>O-Analyzer</div> <div></div>	Dimensions	8" L x 3.1" W x 2.4" H, 205 mm (L) x 80 mm (W) x 60 mm (H)	
	Measurement Range	0 to 500 ppm	<div></div>
	Other Analyzer	GE VeriDri™ Dew-Point Transmitter	
Solvent Purification System			
Description	Column Material	Stainless steel 304 ; 3.0 mm in thickness	
	Inside Dimensions	8.6"(Φ) x 17.7"(L), 220 mm (Φ) x 450 mm (L)	
	Packing Material	High-quality activated carbon	
Optional Components			
Vacuum feedthrough with two valves		Special design to KF40 joint, you can lead the water or gas into the box	
Electrochemical signal feedthrough ( 4 or 8 pins)		Stainless steel 304	

Freezer	Location	Integrated on the side panel of the glovebox
	Inside Dimensions	16.6" L x 10.5" W x 6.4" D, 420 mm L x 266 mm W x 162 mm D
	Capacity	18 L or 32 L, 5 shelves with adjustable height
	Minimum Temperature	-35 °C
Microscope with CCD Camera Systems		Equipment for microscopic analysis of glovebox contents, video-assisted motion can be customized upon request
Cold Well with Cover		Different capabilities of cold wells for low-temperature storage and low-temperature reaction manipulations
Dual Purification Columns		More efficient to remove oxygen and moisture
Organic Solvent Absorber		Regenerable, more efficient to purify organic solvent
Cooling Fan		Accelerate the gas flow in the glovebox chamber
Heating Element		Installed in Main Antechamber; Maximum 200 °C; Temperature control $\pm 1^{\circ}\text{C}$ .
Other Information		
Compliance	UL . ISO9001. CE	
warranty	<ul style="list-style-type: none"> <li>· One year limited warranty, with lifetime support</li> <li>· Rusting or damage due to improper storage condition or maintenance are not covered by this warranty</li> <li>· Consumable items including gloves and oxygen sensors are not covered by this warranty</li> </ul>	
Application Notes & Warnings	<ul style="list-style-type: none"> <li>· The interconnections between the glovebox chamber and the gas purification system must be unimpeded during the purification cycles</li> <li>· The use of corrosive gases is prohibited because they will damage the water and oxygen sensors</li> <li>· Regularly perform regeneration of gas purification columns to maintain the optimum purification efficiency</li> <li>· The O<sub>2</sub> removing rate is highly dependent on the type of purging gas used. To obtain faster chamber purging, Nitrogen is preferred to Argon due to its lighter molecular mass</li> <li>· Corrosive liquid (such as LiPF<sub>6</sub> solution) must be sealed in a container inside the glovebox. Otherwise, liquid vapor may condense and corrode the steel chamber</li> </ul>	

## Order Information

ET	*	1	2	3	4	Description
Standard Glovebox	1200					Dimensions 47.2" L x 29.5" W x 35.4" H
	1500					Dimensions 59.1" L x 29.5" W x 35.4" H
	1800					Dimensions 70.8" L x 29.5" W x 35.4" H
	2400					Dimensions 94.5" L x 29.5" W x 35.4" H
Structure configuration		U				One Glovebox
		S				Split Glovebox
		D				Double Sided Glovebox
Function option			P			Purging System
			G			Gas Purification System, H <sub>2</sub> O、O <sub>2</sub> ≤1ppm
			O			Solvent purification system
Antechamber				A0		Main Cylindrical Antechamber $\varnothing$ 14.2"x23.6" L
				A1		Main Cylindrical Antechamber $\varnothing$ 15.3"x23.6" L
				A2		Mini Cylindrical Antechamber $\varnothing$ 5.9"x13.0" L
				A3		Square Antechamber 15.7" L x 11.8" W x 11.8" H
Other function options					FW	Openable Front Window
					18F	18L Freezers Temperature -32.8°F
					32F	32L Freezers, Temperature -32.8°F

\* The chamber length number is basically required, while 1, 2, 3, or 4 are optional depending on the specific needs by users. Please contact us if special requirements are needed.

Example of ordering numbers:

(1) ET-1000VPGO, indicates a single glovebox with 1000 mm in chamber length, integrated with an auto-purging system, a water/oxygen purification system, and a square transitional tank.

(2) ET-1800SDPG-A3, indicates a split duplex glovebox with two-side access to the glovebox chamber and 1800 mm in chamber length, integrated with an auto-purging system, a water/oxygen purification system, and a square transitional Antechamber.

Thank you for downloading the electronic catalog file. This document is also included in the printed catalog of the Etelux products. The future revised version may be updated and posted online in a timely manner. Please contact us for more information or assistance.

